

# 14" x 17" STENÓS II

Logos Imaging's STENÓS II is our newest, largest and most rugged DR Imaging System, with a 3 mm bottom border.

- Glass-free
- On-board calibration
- Zero RF signature on startup with on/off switch for wireless communications
- All batteries used in the system are removable
- Automatic Exposure Detection (AED) with no additional accessories
- Android compatible



## STENÓS II DR System SPECIFICATIONS

Technology	Amorphous Silicon with TFT
Weight	8.6 lb (3.9 kg) including battery
Battery life	5 hours (2 batteries in a kit)
Dimensions (Panel)	15.2" x 18.1" x 0.6" (386 x 460 x 15 mm)
Pixel Area	13.8" x 16.8" (350 x 427 mm)
Pixel Size	140 µm
Limiting Resolution	3.57 lp/mm
AD Conversion	16 bits
Communications Interface	Wireless IEEE 802.11ac Wired LAN
Communications Range	Wireless 150 m with standard antenna*; Wired 25 m with standard cable reel; Additional network options available

\* Line of Sight; higher gain antennas available for longer range.

## Features

- IP67 and Glass-Free
- 3 mm Bottom Border with 84% Fill Factor
- 140 µm Pixel Size, 3.57 lp/mm
- Up to 10 hours of operation on a single charge



## Contact Logos Imaging

### Mailing Address

P.O. Box 576, Windsor, CO 80550


### Shipping Address

4523 Endeavor Drive, Unit B, Johnstown, CO 80534

**Toll Free** +1 (866) 939-4044  
**Office** +1 (765) 939-4044  
**Fax** +1 (765) 939-4040  
**Email** sales@logosimaging.com  
**Web** www.logosimaging.com



# LOGOS IMAGING

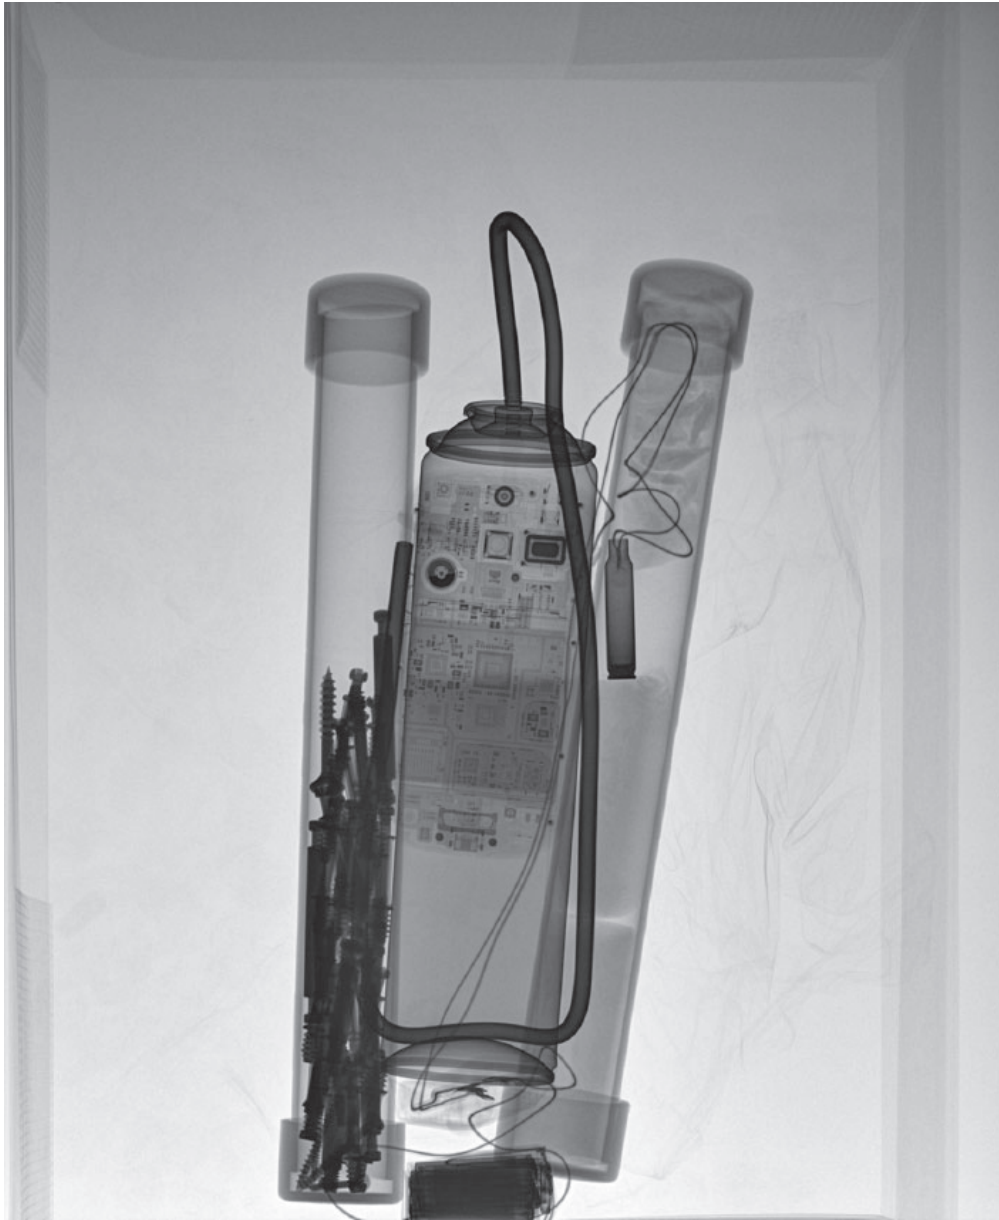

Sample image taken with XRS-3 (15 pulses) on STENÓS II panel from 1 meter.

**Get with our Team to set up a demo date.**

