

# 10" x 10" SOSTÓS II

Logos Imaging's SOSTÓS II complements the range of our newest and most rugged DR Imaging Systems.

- Glass-free
- On-board calibration
- Zero RF signature on startup with on/off switch for wireless communications
- All batteries used in the system are removable
- Automatic Exposure Detection (AED) with no additional accessories
- Android compatible



## SOSTÓS II DR System SPECIFICATIONS

Technology	Amorphous Silicon with TFT
Weight	2.8 lb (1.3 kg) including battery
Battery life	3 hours (2 batteries in a kit)
Dimensions (Panel)	11.14" x 11.14" x 0.6" (283 x 283 x 15 mm)
Pixel Area	10.1" x 10.1" (258 x 258 mm)
Pixel Size	168 µm
Limiting Resolution	2.98 lp/mm
AD Conversion	16 bits
Communications Interface	Wireless IEEE 802.11ac Wired LAN
Communications Range	Wireless 150 m with standard antenna*; Wired 25 m with standard cable reel; Additional network options available

\* Line of Sight; higher gain antennas available for longer range.

## Features

- IP67 and Glass-Free
- 3 mm bottom and side border with 83% Fill Factor
- Under 11 lb (5kg) in typical backpack setup
- AED mode with no on-site connection needed



## Contact Logos Imaging

### Mailing Address

P.O. Box 576, Windsor, CO 80550


### Shipping Address

4523 Endeavor Drive, Unit B, Johnstown, CO 80534

**Toll Free** +1 (866) 939-4044  
**Office** +1 (765) 939-4044  
**Fax** +1 (765) 939-4040  
**Email** sales@logosimaging.com  
**Web** www.logosimaging.com



# LOGOS IMAGING

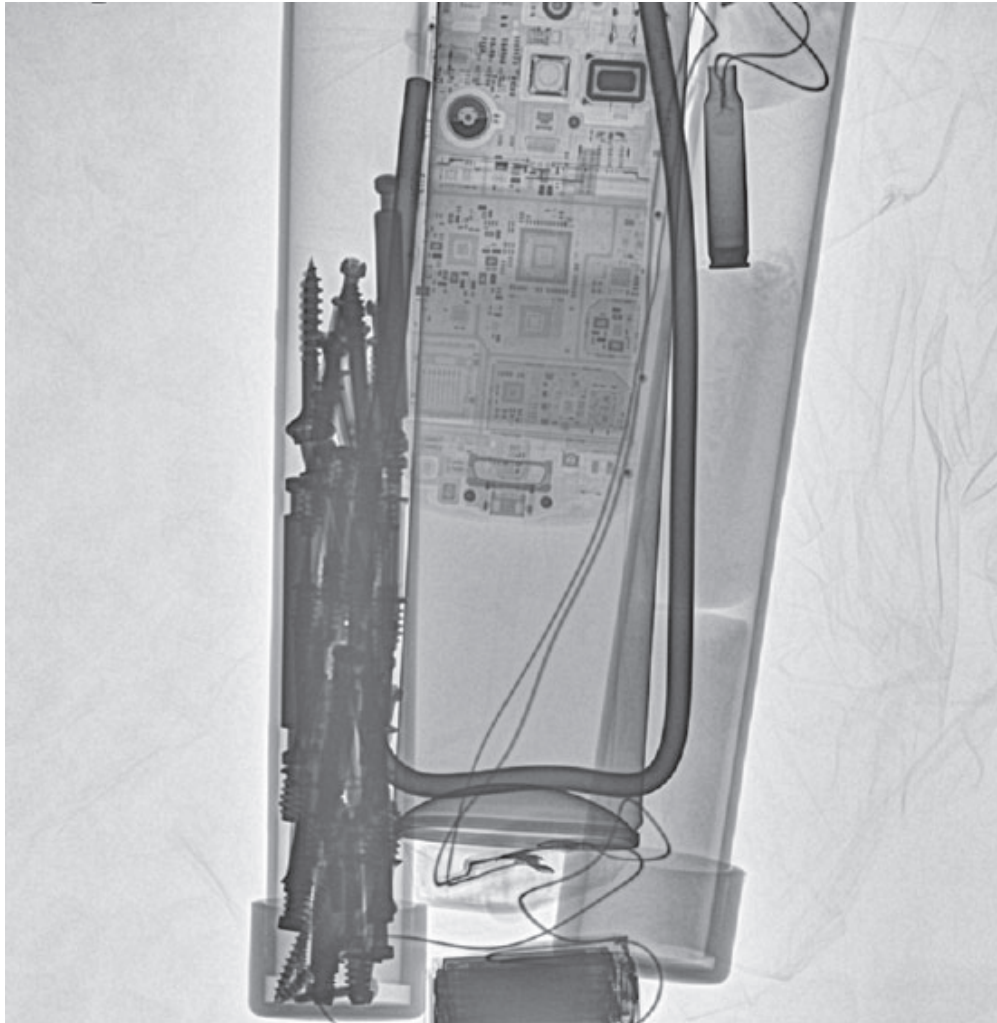

Sample image taken with XR150 20V (15 pulses) on SOSTÓS II panel from 1 meter.

**Get with our Team to set up a demo date.**

